

Front Lower Control Arm Installation Tool - Instructions for use


Assembly #: 2201702 - 944 / 964 / 993

Cars applicable:

944 / 964 / 993 - Front Lower Control Arm Rear Bushing

Parts list:

P/N: 2201702	
Description	Quantity
Cup	1
Piston	1
M12 Threaded Rod	1
M12 Hex nut	2
M12 Standard Flat Washer	2

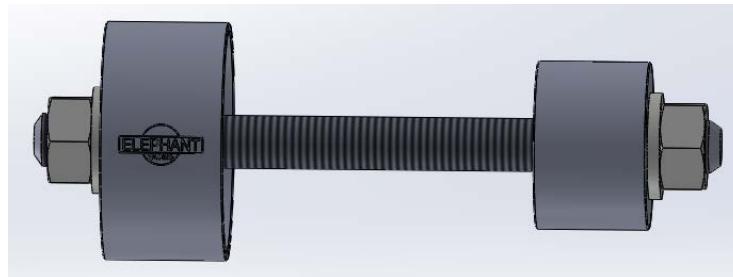


Bushing Installation Tool Assembly

Tools Required:

- 19mm deep socket
- 19mm wrench

Introduction:

We understand that the task of installing new bushings or monoballs into your control arms can be a daunting task. That's why Elephant Racing has devised a set of tools to make installing your new inserts simple and easy. When used in conjunction with the Bushing Removal Tool from Elephant Racing (P/N: 2020903), there's no need to remove the control arm or trailing arm completely from the vehicle!

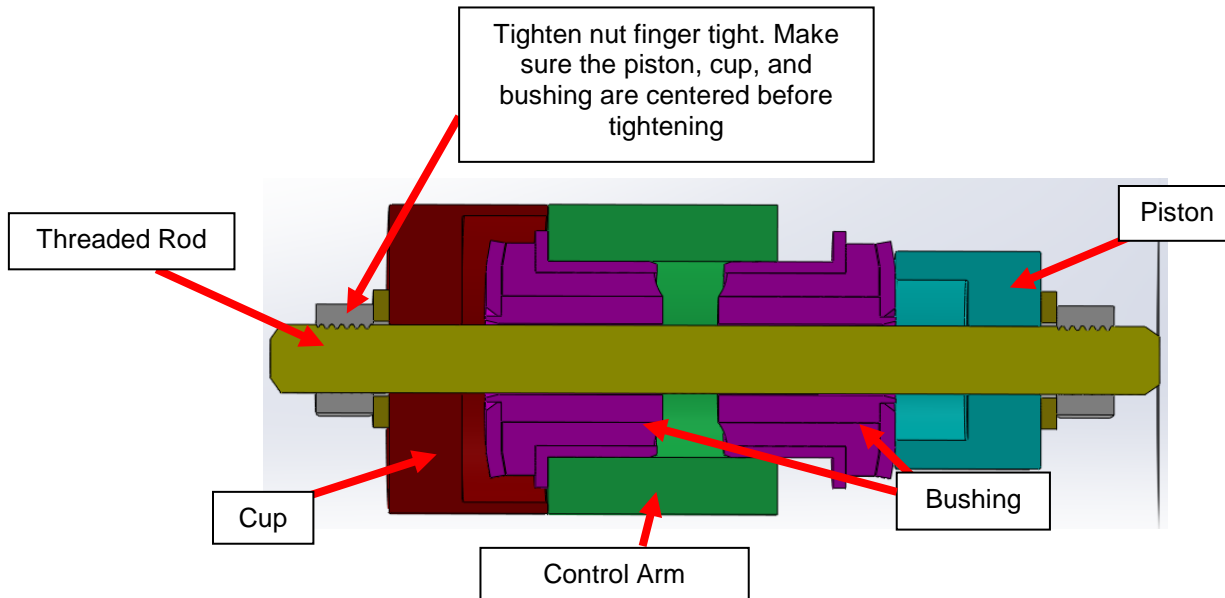Step-by-Step Instructions:**Figure 1: Installation Tool and Bushing / Upright Assembly**

1 – Remove the bushings from the control arms or trailing arms that are going to be replaced. Elephant Racing recommends using the Elephant Racing Bushing Removal Tool (P/N:2020903) to aid in bushing extraction.

2 – Slide the threaded rod through the piston, bushing, and cup. Install the nuts and washers on either side of the assembly and tighten finger tight. See Figure 1

3 – Use two wrenches to tighten the nuts. Ensure the bushing is concentric as it is drawn into the control arm or trailing arm. Continue tightening the nut until the bushing flange contacts the control arm or trailing arm.

4 – Repeat steps 3 and 4 to install the second bushing half in the control arm or trailing arm. Reattach the control arm or trailing arm and torque all fasteners as called out in an approved shop manual.